Instructions to setup your direct Iridium connection for ZAP email.

Simply open MS Outlook as normal. Then press “send and receive” as if your are going to connect. Go through the normal process until you arrive at the “circuit selection” window shown below. Then follow steps 1 to 3.

1. At the circuit selection window highlight your existing circuit and click on “properties” button

Step 1

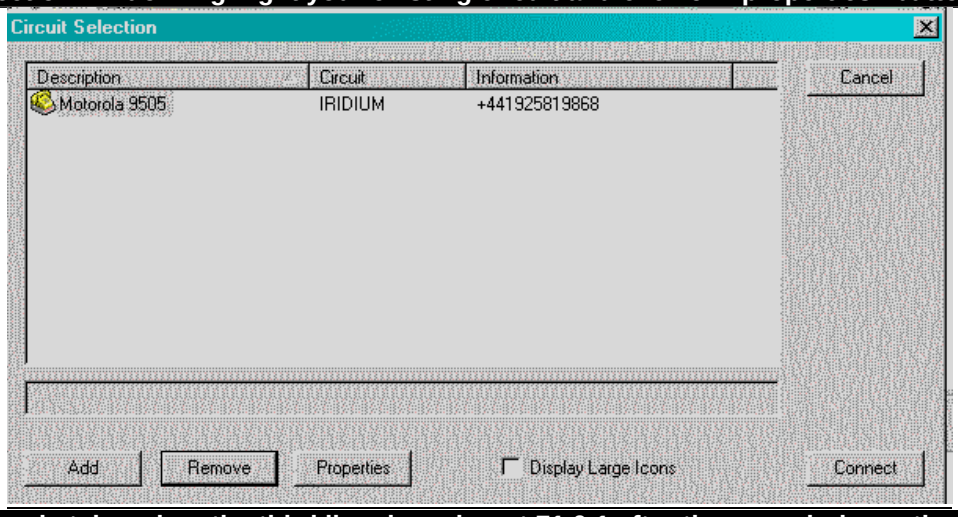

2. Select AT Commands tab and on the third line down insert 71,0,1 after the = symbol exactly as shown

Step 2

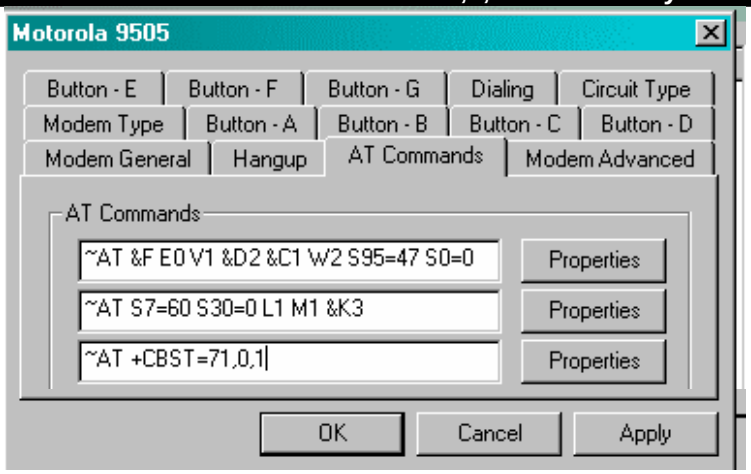

YOU MUST APPLY THESE CHANGES BY CLICKING “APPLY” BEFORE CLICKING “OK”

3. At the dialling properties box enter your new Iridium direct access number 88160000511 exactly as shown

Step 3

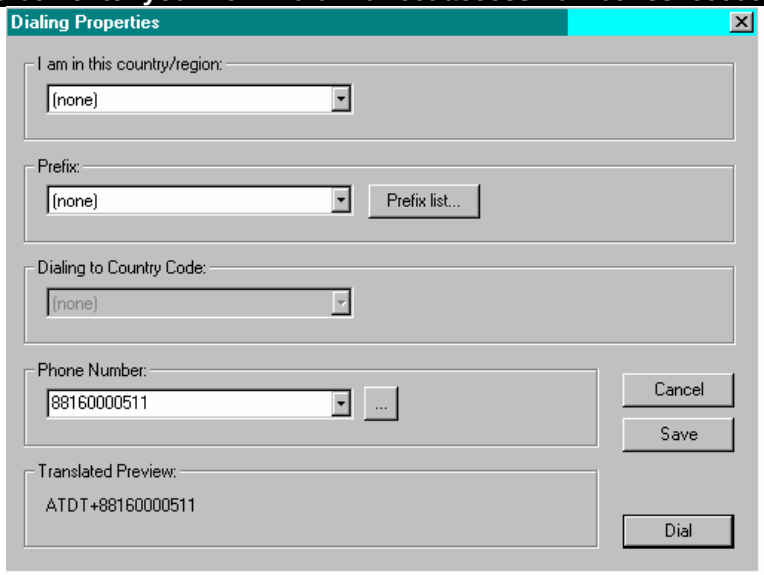

The ATDT Translated Preview must read ATDT+88160000511 as above, or ATDT 0088160000511

PRESS “SAVE” BEFORE LEAVING THIS WINDOW

If you have any difficulty please call AST Airtime’s customer service on: + 44 (0) 1493 441485

For customers with crew calling SIM cards (8816 318 ***) :** The number should be preceded with 698 and 25 spaces should be entered before 88160000511.This pauses the dialling string slightly. In addition no 0’s or + should be used as a prefix. So the number should read as follows 698 88160000511